


4251 / 4245  
4235 / 4225

## Product Specifications

imageRUNNER ADVANCE 4251 shown\*

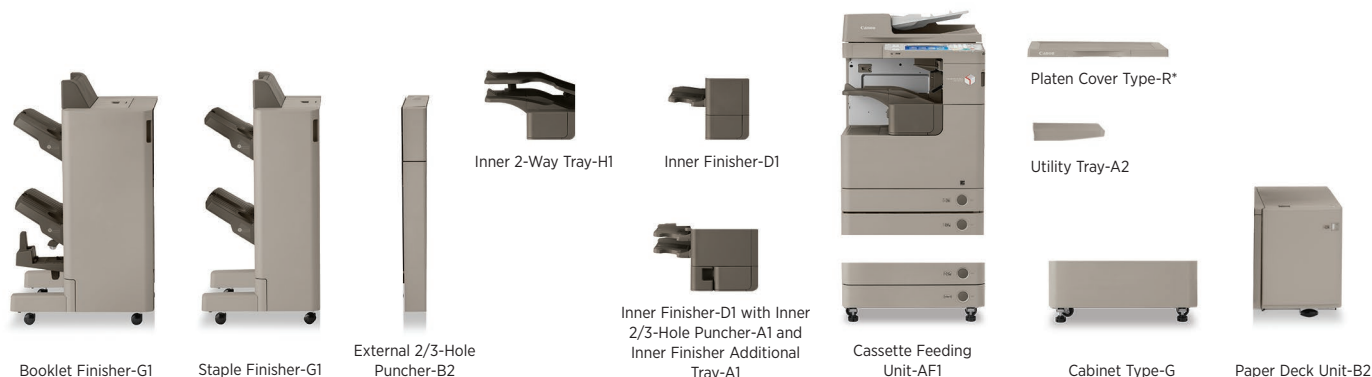

### Main Unit

#### System Type

Digital Multifunction Imaging System

#### Functions

Standard: Copy, Print (UFR II), Scan, Send, Store  
Optional: Print (PCL, Adobe® PostScript® 3™), Fax (Up to 4 Lines)

#### Operation Panel

8.4" SVGA Full-Color TFT Screen

#### Memory

Standard: 1.25GB RAM  
Maximum: 1.75GB RAM

#### Hard Disk Drive

Standard: 160GB  
Maximum: 1TB

#### Mirroring Hard Disk Drive

Optional (160GB, 1TB), Method: RAID1

#### Network Interface Connection

Standard: 10/100/1000Base-TX  
Optional: Wireless LAN

#### Other Interface

Standard: USB 2.0 (Host) x 2, USB 2.0 (Device)  
Optional: Device Port [USB 2.0 (Host) x 2], Copy Control Interface

#### Copy/Print Speed (BW)

Letter: 4251: Up to 51 ppm  
4245: Up to 45 ppm  
4235: Up to 35 ppm  
4225: Up to 25 ppm  
Legal: 4251: Up to 25 ppm  
4245: Up to 25 ppm  
4235: Up to 25 ppm  
4225: Up to 13 ppm  
11" x 17": 4251: Up to 25 ppm  
4245: Up to 22 ppm  
4235: Up to 22 ppm  
4225: Up to 15 ppm

#### Paper Sources (20 lb. Bond)

Standard: Dual 550-sheet Paper Cassettes, 80-sheet Stack Bypass  
Optional: Dual 550 Sheet Paper Cassettes, 2,700-sheet Paper Deck  
Maximum: 4,980 Sheets

#### Output Paper Capacity (20 lb. Bond)

Standard: 250 Sheets (Inner Tray)  
Maximum: 3,100 Sheets (w/Staple Finisher or Booklet Finisher)

#### Output Paper Sizes

Cassette 1: Legal, Letter, Letter-R, Statement-R, Executive, Custom Size (5-1/2" x 7-1/8" to 11-3/4" x 15-3/8")

Cassettes 2/3/4: 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, Custom Size (5-1/2" x 7-1/8" to 11-3/4" x 17")

Bypass: 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, Custom Size (3-7/8" x 5-7/8" to 11-3/4" x 17")

Other: Envelope Feeder Attachment\*\*  
Option: (COM10 No.10, Monarch, DL, ISO-C5)

#### Acceptable Paper Weights

Cassettes: 16 lb. Bond to 34 lb. Bond (60 to 128g/m<sup>2</sup>)  
Bypass: 14 lb. Bond to 80 lb. Cover (52 to 220g/m<sup>2</sup>)

#### Duplexing

Paper Size: Standard Automatic Trayless Duplexing (Executive to 11" x 17")

Paper Weights: 14 lb. Bond to 28 lb. Bond (52 to 105g/m<sup>2</sup>)

#### Special Media Support

Tracing, Labels, Transparency, and Envelopes

#### Warm-up Time

From Power On: 30 Seconds  
From Sleep Mode: 10 Seconds  
Quick Startup Mode: 7 Seconds\*\*\*

#### Power Requirements/Plug

120V AC, 60Hz, 10.4A/NEMA 5-15P

#### Power Consumption

Maximum: 1,500W  
Sleep Mode: 0.9W

#### Dimensions (H x W x D)

4251/4245: 35-1/2" x 22-1/4" x 27-7/8" (909mm x 565mm x 708mm)\*

4235/4225: 30-3/8" x 22-1/4" x 27-5/8" (771mm x 565mm x 700mm)

#### Installation Space (W x D)

(when the Multi-Purpose Tray is extended)

4251/4245: 34-1/2" x 27-7/8" (909mm x 708mm)\*

4235/4225: 34-1/2" x 27-5/8" (876mm x 700mm)

#### Weight (Includes consumables)

4251/4245: Approx. 172 lb. (77.9kg)\*  
4235/4225: Approx. 154 lb. (70kg)

#### Toner (Estimated yield @ 6% coverage)

4251/4245: 34,200 Images  
4235/4225: 30,200 Images

## Main Unit (continued)

### Image Reader Unit

#### Scan Resolution

Up to 600 x 600 dpi†

#### Acceptable Originals (Glass)

Sheet, Book, 3-Dimensional objects [up to 4.4 lb. (2kg)]

#### Maximum Original Size

Up to 11" x 17"

### Document Feeder

#### Scan Method

Duplexing Automatic Document Feeder  
(Standard on 4251/4245)  
(Optional on 4235/4225)

#### Acceptable Originals

Paper Sizes: 11" x 17", Legal, Letter, Letter-R, Statement  
Paper BW: 11 lb. Bond to 34 lb. Bond (42 to 128g/m<sup>2</sup>)  
Weights: Solid Black Text/Color: 17 lb. Bond to 34 lb. Bond  
(64 to 128g/m<sup>2</sup>)

#### Scan Speed (BW/Color; Letter)

Simplex: 51/51 ipm (300 dpi)  
51/30 ipm (600 dpi)†

#### Paper Capacity (20 lb. Bond)

100 Sheets

### Copy Specifications

#### First-Copy-Out Time (Letter)

4251: As fast as 3.7 Seconds  
4245/4235: As fast as 3.8 Seconds  
4225: As fast as 5.2 Seconds

#### Multiple Copies

1 to 999

#### Copy Exposure

Automatic or Manual (9 Levels)

#### Magnification

From Platen  
Glass: 25% - 400% (1% increments)  
From ADF: 25% - 200% (1% increments)

#### Preset Reductions

25%, 50%, 64%, 73%, 78%

#### Preset Enlargements

121%, 129%, 200%, 400%

#### Basic Copy Features

Preset R/E Ratios by Area, Finishing, Two-sided, Density/  
Exposure Adjustment, Original Type Selection, Interrupt Mode,  
Sample Set, Setting Confirmation/Cancel, Standard Keys, Reset,  
Guide Display, Job Duration Display, Reserved Copying

#### Special Copy Features

Two-page Separation, Cover/Sheet Insertion, Booklet,  
Transparency Interleaving, Shift, Margin, Frame Erase, ID Card  
Copy, Image Combination, Different Size Original, Job Build,  
Job Done Notice, Scan Image Check, Mode Memory, Recall,  
Negative/ Positive Inversion, Image Repeat, Mirror Image,  
Sharpness, Tab Paper Creation, Form Composition, Secure  
Watermark, Page Numbering, Copy Set Numbering, Watermark  
and Date, Job Block Combination, Store in User Inbox

### Print Specifications

#### Processor

Canon Dual Custom Processor (Shared)

#### Memory

Standard: 1.25GB RAM  
Maximum: 1.75GB RAM

#### Hard Disk Drive

Standard: 160GB  
Maximum: 1TB

#### Engine Resolution

1200 x 1200 dpi

#### PDL Support

Standard: UFR II  
Optional: PCL 5e, PCL 6, Adobe PS 3

#### Print Driver Supported OS

UFR II, PCL 5e/6, Adobe PS 3:  
Windows® (Windows XP/Windows Vista®/Windows 7/Server  
2003/Server 2008/Server 2008 R2/Windows 8/Server 2012/  
Small Business Server 2011), Windows Terminal Servers (Server  
2003/Server 2008/Server 2008 R2/Server 2012), Small Business  
Server 2011, Windows Clustering Server (Windows Server 2003/  
Server 2008/Server 2008 R2/Server 2012), Citrix (Presentation  
Server 4.5, XenApp 5.0/6.0/6.5, XenDesktop 4.0/5.0/5.5/6),  
Macintosh® (OSX 10.5.8 or later, UFR II and PS 3 Only), VMware  
(vSphere 4/5/5.1), SAP (PS and PCL Only)

#### Direct Print Support

Standard: TIFF, JPEG  
Optional: PDF, EPS††, XPS†††

#### Print Features

Suspend Job Timeout, Subset Finishing (PS only), Profile  
Settings, Secured Print, Watermark, Page Border, Header/Footer,  
Page Layout, Two-sided Printing, Collating, Booklet Printing,  
Grouping, Mixed Paper Sizes/Orientations, Printing  
on Transparencies, Front/Back Covers, Objective, Toner  
Reduction, Poster Printing

### Scan Specifications

#### Network TWAIN Scan

Standard

#### Network Scan Utility

Color Network ScanGear

### Universal Send Specifications

#### Sending Method

E-Mail, I-Fax, File Server (FTP, SMB, WebDAV), Mail Box,  
Super G3 Fax (Optional), IP Fax (VoIP) (Optional)

#### Color Mode

Auto Color Select (Color, Gray), Auto Color Select (Color, Black),  
Full Color, Grayscale, BW

#### Scan Resolution (dpi)†

600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 400 dpi,  
200 x 200 dpi, 200 x 100 dpi, 150 x 150 dpi, 100 x 100 dpi

#### Address Book Capacity

Max. 1,800 Destinations (Incl. 200 One-Touch Buttons)

#### Communication Protocol

File: FTP (TCP/IP), SMB (TCP/IP), WebDAV  
E-mail/I-Fax: SMTP, POP3, I-FAX (Simple, Full)

#### File Format

Standard: TIFF, JPEG, PDF, PDF/XPS (Compact), PDF (Apply  
Policy), PDF (Optimize for Web), PDF/A-1b, XPS,  
PDF/XPS (OCR), OOXML (.pptx)  
Optional: PDF (Trace & Smooth), PDF (Encrypted),  
PDF/XPS (Digital Signature)

#### I-Fax Data Format

BW: TIFF (MH, MR, MMR)

#### Universal Send Features

Two-sided Original, Different-size Originals, Original Type  
Selection, Book to Two Pages, Density Adjustment, Sharpness,  
Document Name, Copy Ratio, Erase Frame, Job Build, Delayed  
Send, Preview, Finished Stamp, Job Done Notice, File Name,  
Subject/Message, Reply-to, Sender's Name (TTI), E-Mail Priority,  
Scan Recovery for Misfeeds

### Fax Specifications

#### Maximum Number of Connection Lines

4

#### Modem Speed

Super G3: 33.6 Kbps  
G3: 14.4 Kbps

#### Compression Method

MH, MR, MMR, JBIG

#### Resolution

400 x 400 dpi, 200 x 400 dpi, 200 x 200 dpi, 200 x 100 dpi

#### Sending/Recording Size

Statement to 11" x 17"

#### Fax Features

Job Forwarding, Different-size Originals, Adjusting Overall  
Density for Scanning, Sharpness, Copy Ratio, Erase Frame,  
Job Build, Specifying the Sender's Name (when sending fax),  
Selecting the Telephone Line (when sending fax), Delayed  
Send, Preview, Finished Stamp, Job Done Notice, Original Type  
Selection, Two-sided Original, Book to Two Pages

## Main Unit (continued)

### Store Specifications

#### Mail Box (Number supported)

100 User Inboxes, 1 Memory RX Inbox,  
50 Confidential Fax Inboxes  
6,000 Maximum Pages Stored

#### Advanced Box

Available Approx. 15GB (Standard HDD)  
Disk Space: Approx. 629GB (ITB HDD)  
Communication Protocol: SMB or WebDAV  
Supported Client PC: Windows (Windows 2000/XP/Windows Vista/7)  
Concurrent Connections (Max.): SMB: 32, WebDAV: 12 (Active Sessions)  
Advanced Box Features: Disabling Advanced Box, Storage Filtering, Authentication for Advanced Box Log-in, Search Function, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support

#### Memory Media

Standard: USB Memory  
Optional: SD, SDHC, CompactFlash®, Memory Stick, Microdrive

### Security Specifications

#### Standard

Department ID Management, Single Sign On-H, Access Management System (Device and Function Level Log-in), Secured Print, Trusted Platform Module, User Access Control of Advanced Box, Mail Box Password Protection, IPV6, Restricting Features (Restricting the Send Function, Restricting New Addresses on Address Book), SSL Encrypted Communication, SNMPv1/v3, MAC/IP Address Port Filtering, SMTP Authentication, POP Authentication before SMTP, HDD Erase (Up to 3x), HDD Initialize (Up to 9x), HDD Lock, IPsec, Adobe LiveCycle Rights Management ES2.5 Integration

#### Optional

Removable HDD, HDD Encryption, HDD Mirroring, Encrypted Secure Print, Encrypted PDF, Document Scan Lock, Secure Watermark, IEEE 2600.1 Common Criteria Certification<sup>2</sup>

### Environmental Information

#### ENERGY STAR® Qualified

#### Rated EPEAT® Silver

#### RoHS Compliant

#### Ecomark<sup>□□</sup>

#### Blue Angel

#### WEEE Directive

## Optional Accessories

### Paper Supply Options

#### Cassette Feeding Unit-AF1

Paper Capacity: 550 Sheets x 2 Cassettes [20 lb. Bond (80g/m<sup>2</sup>)]  
Acceptable Paper Weight: 16 lb. Bond to 34 lb. Bond (60 to 128g/m<sup>2</sup>)  
Acceptable Paper Size: 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, and Custom Size [5-1/2" x 7-1/8" to 11-3/4" x 17" (140mm x 182mm to 297mm x 431mm)]

Power Source/ Maximum Power Consumption: From the Main Unit/Approx. 30W  
Dimensions (H x W x D): 9-3/4" x 24-1/8" x 25-5/8" (248mm x 565mm x 650mm)  
Weight: Approx. 61 lb. (27.5kg)

#### Paper Deck Unit-B2

Paper Capacity: 2,700 Sheets [20 lb. Bond (80g/m<sup>2</sup>)]  
Number of Drawers: 1  
Acceptable Paper Weight: 16 lb. Bond to 34 lb. Bond (60 to 128g/m<sup>2</sup>)  
Acceptable Paper Size: Letter

Power Source/ Maximum Power Consumption: From Main Unit/Approx. 35W  
Dimensions (H x W x D): 18-5/8" x 14-5/8" x 23-3/4" (473mm x 372mm x 603mm)  
Weight: Approx. 81.6 lb. (37kg)

#### Envelope Feeder Attachment-D1\*\*

Paper Capacity: 50 Sheets (or 30mm in height)  
Acceptable Paper Size: COM10 No.10, Monarch, DL, ISO-C5  
Feeding Speed: 10 cpm  
Dimensions (H x W x D): 3-1/4" x 17-1/4" x 12-1/8" (81mm x 439mm x 307mm)  
Weight: Approx. 2.6 lb. (1.2kg)

### Output Options

#### Inner 2-way Tray-H1

Number of Trays: 2  
Total Output Capacity: **Upper Tray:** 250 Sheets (20 lb. Bond) **Lower Tray:** 100 Sheets (20 lb. Bond)  
Acceptable Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220g/m<sup>2</sup>)  
Acceptable Paper Size: 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, Custom Size [3-7/8" x 5-7/8" to 11-3/4" x 17" (99mm x 148mm to 297mm x 431.8mm)], and Envelopes  
Dimensions (H x W x D): 3" x 16-7/8" x 16" (76mm x 427mm x 407mm)  
Weight: Approx. 1 lb. (574g)

#### Inner Finisher-D1

Number of Trays: Up to 2 Trays (With Inner Finisher Additional Tray-A1)  
Total Output Capacity: **Without Inner Finisher Additional Tray-A1:** 1,000 Sheets (Letter, Executive) **With Inner Finisher Additional Tray-A1**  
**Top Tray:** 100 Sheets **Lower Tray:** 500 Sheets  
Acceptable Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220g/m<sup>2</sup>)  
Acceptable Paper Size: 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive, and Envelopes  
Staple Positions: **Corner Stapling:** (11" x 17", Legal, Letter, Letter-R, Executive)  
Maximum Stapling Capacity: **Letter and Executive:** 50 Sheets (14 to 22 lb. Bond) 30 Sheets (23 to 28 lb. Bond) 2 Sheets (29 lb. Bond to 80 lb. Cover) **11" x 17", Legal and Letter-R:** 30 Sheets (14 to 22 lb. Bond) 20 Sheets (23 to 28 lb. Bond) 2 Sheets (29 lb. Bond to 80 lb. Cover)

Paper Capacity of Staple Mode: **Top Tray:** 15 Sets (or 3/8" in height) **Lower Tray:** 30 Sets (or 4-7/8" in height)  
Type of Staple: Staple-J1 (5,000 x 3)

Power Source/ Maximum Power Consumption: From the Main Unit/Approx. 49W  
Dimensions (H x W x D): 11-5/8" x 27-1/2" x 21-7/8" [295mm x 697mm x 554mm (When the Auxiliary Tray is extended)]  
Weight: Approx. 29.7 lb. (13.5kg) (When the optional Inner Finisher Additional Tray-A1 is attached)

#### Staple Finisher-G1

Number of Trays: 2  
Total Output Capacity: 3,000 Sheets (Letter, Statement-R, Executive) **Top Tray:** 1,300 Sheets (Letter, Executive) 650 Sheets (11" x 17", Legal, Letter-R, Statement-R) **Lower Tray:** 1,700 Sheets (Letter, Executive) 650 Sheets (11" x 17", Legal, Letter-R, Statement-R)

Acceptable Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220g/m<sup>2</sup>)  
Acceptable Paper Size: 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive  
Staple Positions: **Corner/Double Stapling:** 11" x 17", Legal, Letter, Letter-R, Executive  
Paper Capacity of Staple Mode: **Top Tray:** 1,300 Sheets/30 Sets (Letter, Executive) 650 Sheets/30 Sets (11" x 17", Legal, Letter-R) **Lower Tray:** 1,700 Sheets/30 Sets (Letter, Executive) 650 Sheets/30 Sets (11" x 17", Legal, Letter-R)

Type of Staple: Staple-J1 (5,000 x 3)  
Power Source/ Maximum Power Consumption: From the Main Unit/Approx. 85W  
Dimensions (H x W x D): 43-1/4" x 25-1/2" x 25-1/2" [1097mm x 648mm x 648mm (When the Auxiliary Tray is extended)]

Weight: Approx. 101 lb. (46kg)

**Optional Accessories** (continued)

**Output Options** (continued)

**Booklet Finisher-G1**

Number of Trays: 2

Total Output Capacity: 3,000 Sheets (Letter, Statement-R, Executive)

**Top Tray:** 1,300 Sheets (Letter, Statement-R, Executive)  
650 Sheets (11" x 17", Legal, Letter-R)

**Lower Tray:** 1,700 Sheets (Letter, Statement-R, Executive)  
650 Sheets (11" x 17", Legal, Letter-R)

Acceptable Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220g/m<sup>2</sup>)

Acceptable Paper Size: 11" x 17", Legal, Letter, Letter-R, Statement-R, Executive

Staple Positions: **Corner/Double Stapling:** 11" x 17", Legal, Letter, Letter-R, Executive  
**Saddle-Stitch:** 11" x 17", Legal, Letter-R

Maximum Stapling Capacity: **Letter and Executive:** 50 Sheets (14 to 22 lb. Bond)  
30 Sheets (23 to 28 lb. Bond)  
2 Sheets (29 lb. Bond to 80 lb. Cover)  
**11" x 17", Legal and Letter-R:** 30 Sheets (14 to 22 lb. Bond)  
20 Sheets (23 to 28 lb. Bond)  
2 Sheets (29 lb. Bond to 80 lb. Cover)

Paper Capacity of Staple Mode: **Top Tray:** 1,300 Sheets/30 Sets (Letter, Executive), 650 Sheets/30 Sets (11" x 17", Legal, Letter-R)  
**Lower Tray:** 1,700 Sheets/30 Sets (Letter, Executive), 650 Sheets/30 Sets (11" x 17", Legal, Letter-R)

Maximum Saddle-Stitch Capacity: 16 Sheets (16 to 22 lb. Bond) (11" x 17", Legal, Letter-R)  
10 Sheets (22 to 28 lb. Bond) (11" x 17", Legal, Letter-R)

Paper Capacity of Saddle-Stitch Mode: 25 Booklets (5-sheet Booklets)

Type of Staple: Staple-J1 (5,000 x 3)  
Staple Cartridge-D1 (2,000 x 3)

Power Source/Maximum Power Consumption: From the Main Unit/Approx. 113W

Dimensions (H x W x D): 43-1/4" x 30-1/8" x 25-1/2"  
[1097mm x 766mm x 646mm (When the Auxiliary Tray is extended)]

Weight: Approx. 165 lb. (75kg)

**Inner 2/3-Hole Puncher-A1\***

Acceptable Punch Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220g/m<sup>2</sup>)

Acceptable Punch Paper Size: 11" x 17", Legal, Letter, Letter-R

Punch Type: **2 Holes:** (Legal, Letter-R)  
**3 Holes:** (11" x 17", Letter)

Distance Between Punch Holes: **2 Holes:** 2-3/4" (70mm)  
**3 Holes:** 4-1/4" (108mm)

Punch Waste Tray Capacity: Approx. 1,500 sheets (21 lb. Bond)

Power Source/Maximum Power Consumption: From the Main Unit/Approx. 37W

Dimensions (H x W x D): 8-1/2" x 5-5/8" x 20-7/8"  
(216mm x 144mm x 531mm)

Weight: Approx. 15.2 lb. (6.9kg)

**External 2/3-Hole Puncher-B2\*\***

Acceptable Punch Paper Weight: 14 lb. Bond to 80 lb. Cover (52 to 220g/m<sup>2</sup>)

Acceptable Punch Paper Size: 11" x 17", Legal, Letter, Letter-R

Punch Type: **2 Holes:** (Legal, Letter-R)  
**3 Holes:** (11" x 17", Letter)

Distance Between Punch Holes: **2 Holes:** 2-3/4" (70mm)  
**3 Holes:** 4-1/4" (108mm)

Punch Waste Tray Capacity: Approx. 3,000 sheets (21 lb. Bond)

Power Source: From the Main Unit

Dimensions (H x W x D): 35-3/4" x 4-1/4" x 24-1/2"  
(908mm x 107mm x 623mm)

Weight: Approx. 15.9 lb. (7.2kg)

**Other Optional Accessories**

- Cabinet Type-G
- Platen Cover Type-R\*
- Inner Finisher Additional Tray-A1\*
- Inner Finisher-D1 with 2/3 Hole Puncher-A1\*\*\*
- Utility Tray-A2
- USB Keyboard
- Card Reader-F1
- Copy Card Reader Attachment Kit-B2
- Convenience Stapler-B1
- Braille Label Kit-F1
- ADF Access Handle-A1
- Super G3 Fax Board-API
- Super G3 2nd Line Fax Board-API
- Super G3 3rd/4th Line Fax Board-AL1
- Remote Fax Kit-A1
- IP FAX Expansion Kit-A1
- Barcode Printing Kit-D1
- Web Access Software-H1
- Multimedia Reader/Writer-A2
- Additional Memory Type A (512MB)
- iR-ADV Security Kit-K1 for IEEE 2600.1 Common Criteria Certification†

\* Duplexing Automatic Document Feeder-AG1 optional on 4235/4225 models and standard on 4251/4245 models. Platen Cover Type-R or Duplexing Automatic Document Feeder-AG1 must be selected on 4235/4225 models.

\*\* Can be set to Cassette 2 only. Can not install Envelope Feeder Attachment and Tab Feeder Attachment at same time.

\*\*\* If "Quick Startup Settings for Main Power" is set to ON, it takes seven seconds until the key operation on the touch-panel display is available after turning on the main power and 10 seconds until the start button function is available.

† Includes DADF.

† Standard color scan support for 100 dpi and 300 dpi. Up to 600-dpi scanning requires additional Memory Type A (512MB).

†† EPS can be printed directly only from the Remote User Interface.

††† XPS cannot be printed directly from the Web Access Software.

□ Specified configurations and settings need to be applied to the device in order to achieve and maintain IEEE 2600.1 Common Criteria Certification. Contact your Canon Authorized Dealer for more information and availability.

□□ Applies only to 4245/4235/4225 models.

▲ Option for Inner Finisher-D1.

▲▲ Option for Staple Finisher-G1 or Booklet Finisher-G1.

▲▲▲ Cannot be installed with Inner Finisher-D1 or 2/3 Hole Puncher-A1.

**NOTE:** Some accessories require additional equipment or may be prerequisites for other options. Some accessories cannot be installed simultaneously. Check with your Canon Authorized Dealer for details.

**•STERLING BUSINESS SYSTEMS•**

3600 Veterans Memorial Highway  
Bohemia, NY 11716  
(631) 750-6162 Fax (631) 750-6165  
sterling-digital.com



As an ENERGY STAR® Partner, Canon U.S.A., Inc. has qualified these models as meeting the ENERGY STAR energy efficiency criteria through an EPA recognized certification body. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. CANON, IMAGERUNNER, MEAP, and the GENUINE logo are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEWARE is a registered trademark of Canon U.S.A., Inc. in the United States and is a trademark of Canon Inc. in certain other countries. All other referenced product names and marks are trademarks of their respective owners and hereby acknowledged. Specifications and availability subject to change without notice. All printer output images are simulated.

©2013 Canon U.S.A., Inc. All rights reserved.

